



## IR Dimmer Installation Instructions


- ① Identify the location to mount the IR dimmer. Clean the area with the alcohol swab provided and let dry.
- ② Be sure to install the dimmer before the first light strip or "Y" connector.
- ③ Connect the dimmer to the power supply and the blue light on the dimmer should come on.

**\*\*\*If the blue light does not come on, install the twisted connector cable between the power supply side and the dimmer.\*\*\***

- ④ Remove the double back tape and adhere the dimmer to the underside of the cabinet.

Continued on back...

- 5 Swipe hand past sensor to turn the lights on and off.
- 6 Hold hand under sensor to dim or brighten the lights.
- 7 To retain same light brightness, hold hand under sensor until lights turn on.

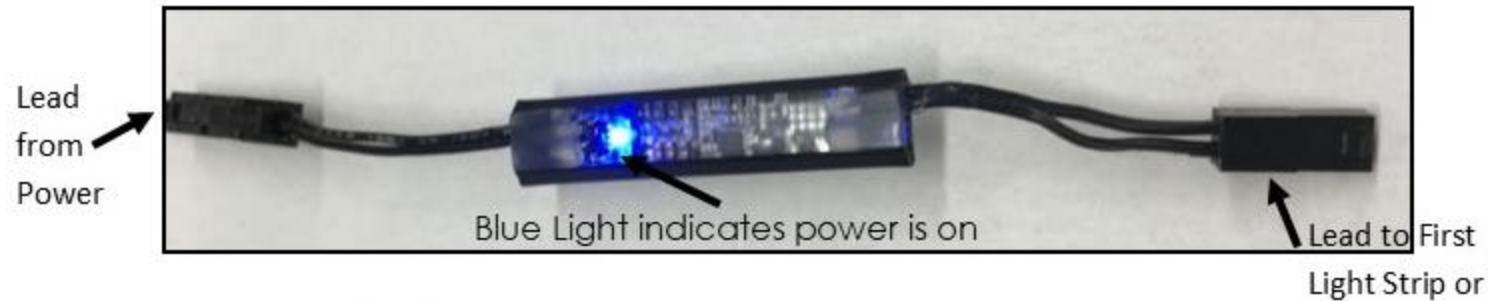

**For additional product or installation assistance  
please call 302-294-6261.**

FOR USE WITH LANDSCAPE LIGHTING SYSTEM ONLY. THIS DEVICE IS ACCEPTED AS A LANDSCAPE LIGHTING SYSTEM WHERE THE SUITABILITY OF THE COMBINATION SHALL BE DETERMINED BY CSA OR LOCAL INSPECTION AUTHORITIES HAVING JURISDICTION. LANDSCAPE LIGHTING SYSTEMS ARE FOR OUTDOOR USE ONLY. NOT FOR USE IN DWELLING UNITS. DO NOT MOUNT POWER SUPPLY OR LUMINAIRES WITHIN 3M OF A SWIMMING POOL OR SPA. NOT FOR USE WITH SUBMERSIBLE FIXTURES. USE ONLY WITH I-LIGHTING EASY PLUG CONNECTOR CABLES AND POWER SUPPLIES. FOR ADDITIONAL CABLES PLEASE CALL 888-305-4232. THE POST LIGHTS PULL 0.7 MILLI AMPS EACH. USE ONLY 90% OF THE POWER SUPPLIES WATTAGE, ALLOWING 10% FREE. LOW VOLTAGE CABLE SHALL: BE PROTECTED BY ROUTING IN CLOSE PROXIMITY TO THE LUMINAIRE OR FITTING, OR NEXT TO A BUILDING STRUCTURE SUCH AS A HOUSE OR DECK; NOT BE BURIED EXCEPT FOR A MAXIMUM 6" (15.2CM) IN ORDER TO CONNECT TO THE MAIN LOW VOLTAGE CABLE; AND HAVE THE LENGTH CUT OFF SO THAT IT IS CONNECTED TO A CONNECTOR WITH 6" (15.2CM) FROM A BUILDING STRUCTURE, A LUMINAIRE, OR FITTING.